




Specifications

F.O.B Sedalia, Missouri 65301

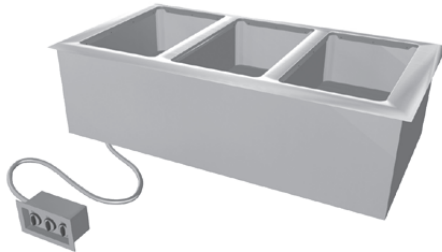

ADI-3E -SW

OPTIONS:

- 3 phase wiring (except ADI-1E-SW)
- Individual valves
- Manifold drains
- Master valve
- Glass display shelves - 98x Series
- Serving shelves - 956/956-460-x Series
- Buffet shelves - 83x, 93xFL, 93xHT, 93xBL
- Self-service canopies - TS560-xx, TS530-xx-1SN
- Telescope covers - 548, 546
- Removable S/S carving station - CS-2
- Adapter Plates - 31, 32, 33
- Adapter Bars - 513, 516

AGENCY LISTING:



DUKE MANUFACTURING CO.
 2305 N. Broadway
 St. Louis, MO 63102

800.735.3853 Toll Free
 314.231.5074 Fax
 www.dukemfg.com

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____
 ITEM: _____
 QUANTITY: _____

MODEL:

Drop-Ins - Hot Food Electric - Sealed Well

- | | |
|------------------------------------|--------------------------------|
| <input type="checkbox"/> ADI-1E-SW | 18-1/4"L x 24-1/4"W x 12-3/4"H |
| <input type="checkbox"/> ADI-2E-SW | 32-1/4"L x 24-1/4"W x 12-3/4"H |
| <input type="checkbox"/> ADI-3E-SW | 46-1/4"L x 24-1/4"W x 12-3/4"H |
| <input type="checkbox"/> ADI-4E-SW | 60-1/4"L x 24-1/4"W x 12-3/4"H |
| <input type="checkbox"/> ADI-5E-SW | 74-1/4"L x 24-1/4"W x 12-3/4"H |
| <input type="checkbox"/> ADI-6E-SW | 88-1/4"L x 24-1/4"W x 12-3/4"H |

TOP RIM:

- Heavy gauge, 300 Series stainless steel
- 15/16" overhang on front, back and ends
- Reinforced rim
- Vinyl foam gasket as sealant
- Die-stamped openings - 12-1/16" x 20-1/16"

HEAT COMPARTMENTS:

- 6-1/4" deep stainless steel liner, wet or dry operation
- Exposed element in each compartment
 - 750 watt, 120 Volt/1 Ph
 - 900 watt, 208 Volt/1 Ph
 - 1200 watt, 240 Volt/1 Ph
- Insulated bottom
- Individual open drains

CONTROL PANEL:


- Stainless steel face plate, plastic knobs
- Infinite switch controls in remote box
- 2 panels on units with 4, 5 or 6 wells
- UL approved

EXTERIOR HOUSING


- Heavy gauge paint grip steel

SHORT FORM SPECIFICATIONS:


Duke Drop-In - Hot Food - Electric - Sealed Wells. Top rim to be constructed of heavy gauge, 300 Series stainless steel with 15/16" overhang on front, back and ends. Rim to be reinforced with heavy gauge steel angle and provided with vinyl foam gasket as sealant with top surface. Top to have die-stamped openings, each measuring 12-1/6" x 20-1/6" (front to back). Heat compartments to be die-formed, 6-1/4" deep, of stainless steel and insulated on all four sides. Each compartment to have 750 watts @ 120 volts, 900 watts @ 208 volts or 1200 watts @ 240 volts, electric element fitted under warming compartment, above insulated bottom. Unit to be wired to operate on specified voltage, with single phase standard for hard wired in field only. Three phase available. Control panel of stainless steel. UL approved remote control designed for installation on operator's side. Infinite switch controls. Two remote control panels for 4-, 5- and 6- well models. Exterior to be of heavy gauge steel

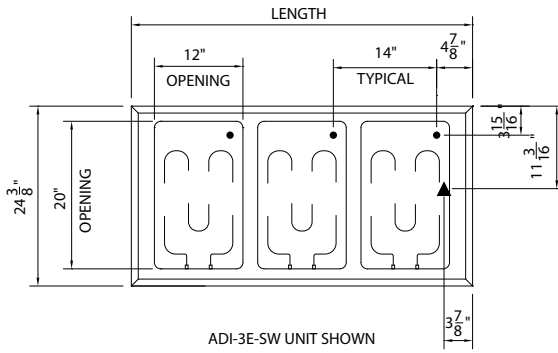

TOP VIEW

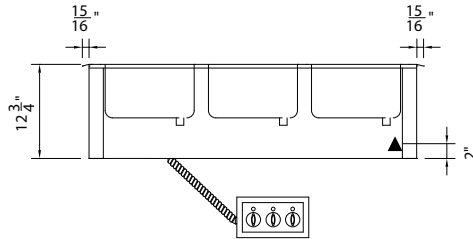

FRONT VIEW



RIGHT SIDE VIEW

FREIGHT CLASS: 100

**DROP INS - HOT FOOD
ELECTRIC - SEALED WELLS**

- ADI-1E-SW 18-1/4\"L x 24-1/4\"W x 12-3/4\"H
- ADI-2E-SW 32-1/4\"L x 24-1/4\"W x 12-3/4\"H
- ADI-3E-SW 46-1/4\"L x 24-1/4\"W x 12-3/4\"H
- ADI-4E-SW 60-1/4\"L x 24-1/4\"W x 12-3/4\"H
- ADI-5E-SW 74-1/4\"L x 24-1/4\"W x 12-3/4\"H
- ADI-6E-SW 88-1/4\"L x 24-1/4\"W x 12-3/4\"H

LEGEND	
▲	- ELECTRICAL CONNECTION
●	- DRAIN LOCATION
Allow 4\" gap between controls and unit	

Model	Length		Width		Height		Top Openings	Cutout Length		Cutout Width		Control Panels	Cube ft. Crated	Weight	
	in.	cm	in.	cm	in.	cm		in.	cm	in.	cm			lbs.	kg.
ADI-1E-SW	18-1/4	46.4	24-1/4	61.6	24-3/4	32.4	1	17	43.2	23	58.4	1	8.2	43	19.6
ADI-2E-SW	32-1/4	81.9	24-1/4	61.6	24-3/4	32.4	2	31	78.7	23	58.4	1	13.0	75	34.1
ADI-3E-SW	46-1/4	117.5	24-1/4	61.6	24-3/4	32.4	3	45	114.3	23	58.4	1	17.7	90	40.9
ADI-4E-SW	60-1/4	153.0	24-1/4	61.6	24-3/4	32.4	4	59	149.9	23	58.4	2	22.5	115	52.3
ADI-5E-SW	74-1/4	188.6	24-1/4	61.6	24-3/4	32.4	5	73	185.4	23	58.4	2	27.2	140	63.6
ADI-6E-SW	88-1/4	224.2	24-1/4	61.6	24-3/4	32.4	3	87	221.0	23	58.4	2	32.0	220	100.0

REMOTE CONTROL CUTOUT IS 9\" X 4-3/8\"

Model	120 Volt/500 Watt		208 Volt/750 Watt		240 Volt/750 Watt	
	watts	amps	watts	amps	watts	amps
ADI-1E-SW	750	6.3	900	4.3	1200	5.0
ADI-2E-SW	1500	12.5	1800	8.7	2400	10.0
ADI-3E-SW	2250	18.8	2700	13.0	3600	15.0
ADI-4E-SW	3000	25.0	3600	17.3	4800	20.0
ADI-5E-SW	3750	31.3	4500	21.6	6000	25.0
ADI-6E-SW	n/a	n/a	5400	26.0	7200	30.0

DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102



800.735.3853 Toll Free
800.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

Specification subject to change

01/10
Printed in U.S.A.
© 2010, Duke Manufacturing Co.