



Specifications

F.O.B St. Louis, Missouri 63102



613Q-E2
(Shown w/optional casters)

OPTIONS:

- Stainless steel interior
- 8" stainless steel angular legs
- Stainless steel back enclosure panel
- Seismic feet
- High Voltage (380/415/440/480)
- Casters
- Double stack - shipped assembled
- Porcelain drip tray
- Extra oven racks - standard and deep depth
- Prison package - tamper proof screws, lexan hinged cover with lockable clasp
- Extended warranty

AGENCY LISTINGS:



DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
314-231-1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____
ITEM: _____
QUANTITY: _____

MODEL:

Duke Convection Ovens - "Q" Series Double Section - Standard Depth - Electric

- 613Q-E2** Double section, standard depth

STANDARD FEATURES:

- 6 racks/13 rack positions
- Porcelain interior finish
- 50/50 stainless steel doors
- Double pane glass both doors
- 8" angular painted legs

OVEN SECTION:

- Stainless steel front, sides and top
- 1-1/2" insulation on bottom, sides and back
- 3" insulation on top

OVEN CONTROLS:

- "V" - Basic snap action thermostat (200° - 500°F), 60 minute electric dial timer with continuous sound buzzer, 2-speed fan
- "XX" - Solid state digital time and temperature controls, 12-hour countdown timer, **Cook and Hold** feature, 2-speed fan, Pulse fan capability
- "ZZ" - 10 programmable menu buttons, 5-rack ID timers, computerized digital time and temperature controls, Cook and Hold feature, 2-speed fan, Pulse Fan capacity

SHORT FORM SPECIFICATIONS:

Duke Convection Ovens - "Q" Series - Electric - Double Section - Standard Depth. Unit shall have stainless steel exterior front, sides, door, top, interior door liners and door gaskets. Bottom, back and sides, to be fully insulated with 1-1/2" thick board type insulation, top to have 3" thick insulation. Interior shall be porcelain enameled interior, with 6 racks and 13 rack positions and 7/8" radius coved corners. Each oven section shall be heated with 11 KW input, with 1/2 HP, 2-speed blower motor. Fuse protected against overload. An ON-OFF-COOL DOWN switch shall be supplied. Doors shall be 50/50 independently opening, stainless steel with doublepane glass in both doors mounted on full length solid stainless steel shafts and bronze bushings for each door. Interior lighting to be (2) 50 watt, 115v bulbs. Legs shall be angular 8" high stainless steel, with adjustable feet. Two speed blower motor. Overall dimensions of unit shall be: 70-1/2" height, including 8" legs, 38" width, depth of 39-1/2" and cavity dimensions of 29"W x 24"H x 24"D.

DUKE CONVECTION OVENS - "Q" SERIES - DOUBLE - STANDARD DEPTH - ELECTRIC


Catalog No. DCO-QUELECD5

A.I.A. File No. 35-C-13

DUKE CONVECTION OVENS

"Q" SERIES - DOUBLE SECTION - ELECTRIC - STANDARD DEPTH


☐ 613Q-E2 Double section, standard depth

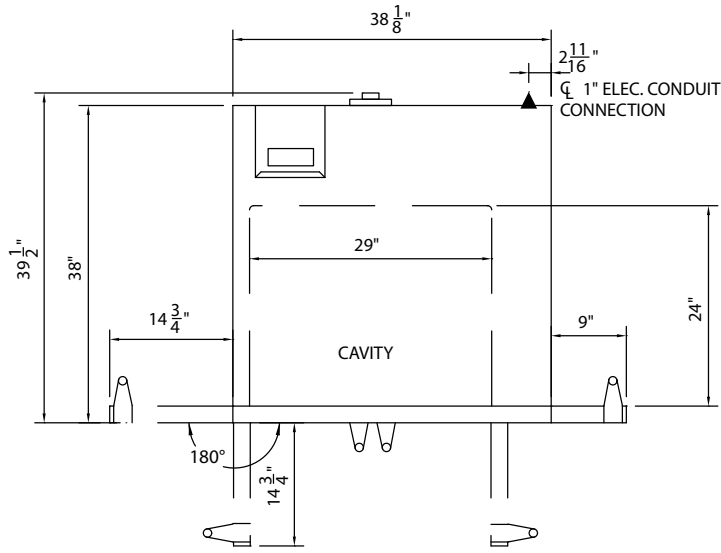


TOP VIEW

| Electrical Specifications - Per Section | | | | |
|---|-----------|-----------|-----------|------|
| | 208V Amps | 240V Amps | 480V Amps | KW |
| 1 Phase | 52.8 | 45.8 | n/a | 10.0 |
| 3 Phase | 30.5 | 26.5 | 13.3 | 10.0 |

▲ - Electronic connection point

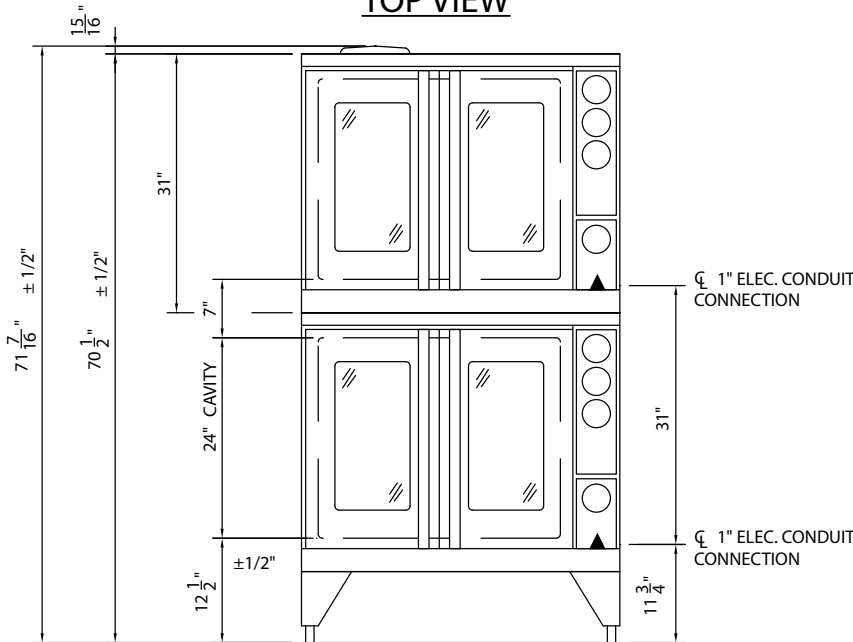

FRONT VIEW

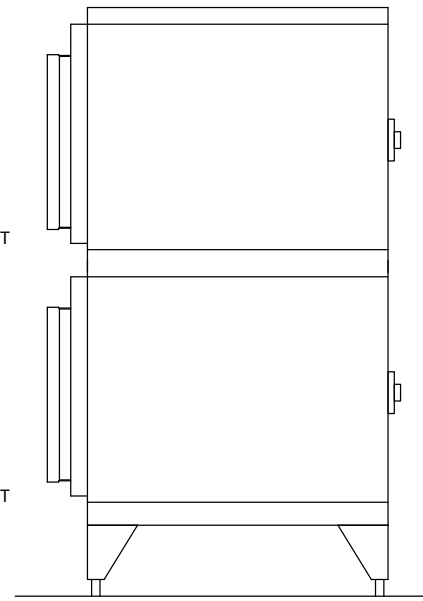

RIGHT SIDE VIEW

DIMENSIONS:

FREIGHT CLASS: 85

| Model | Depth front view | | Width | | Height top view | | Cube ft. crated | Weight | |
|---------|------------------|-------|-------|------|-----------------|-------|-----------------|--------|-------|
| | in | cm | in. | cm | in. | cm | | lbs | kg |
| 613Q-E2 | 39-1/2 | 100.3 | 38 | 96.5 | 70-1/2 | 179.1 | 69.7 | 1020 | 463.6 |



DUKE MANUFACTURING CO.
 2305 N. Broadway
 St. Louis, MO 63102

800.735.3853 Toll Free
 800.231.1130 In Missouri
 314.231.5074 Fax
www.dukemfg.com

Specification subject to change