




Specifications

F.O.B Sedalia, Missouri 65301

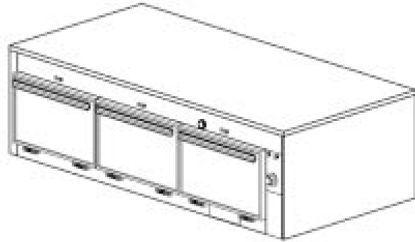

1603

OPTIONS:

- Enclosed base - 6" high
- Cord and plug - 8'
- Casters - 5" polyurethane, 2 swivel w/brakes 2 rigid
- Push bar
- Bumpers - stainless steel
- Door Panels - laminated plastic
- Additional pair 3" angle slides
- Door locks
- Legs
- 440-480V Circuit
- Celsius thermometer in lieu of Fahrenheit
- 208V/1Ph; 208V/3Ph; 240V/1 PH; 240/3PH

AGENCY LISTING:



DUKE MANUFACTURING CO.
 2305 N. Broadway
 St. Louis, MO 63102

800.735.3853 Toll Free
 314.231.5074 Fax
 www.dukemfg.com

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____
 ITEM: _____
 QUANTITY: _____

MODEL:

Thermotainer Food Holding Cabinets - "A" Series 9"H x 14"W x 23-1/2" D Compartments

- 1603** Reach-In 1 thermostat for 3 compartments , w/o legs
- 1603P** Pass-Thru 1 thermostat for 3 compartments, w/o legs

BODY:

- Heavy gauge stainless steel, all panels except bottom
- Shell welded to interior
- Die-stamped compartment openings

DOORS:

- Stainless steel, die-stamped, embossed front
- Ribbed Interior
- Reinforced for mounting hardware
- Insulated with fiberglass
- Spring hinges die-stamped, with built-in-stop externally adjustable, completely concealed

COMPARTMENT:

- Heavy gauge stainless steel
- Rounded corners
- Stainless steel studs for angle slides at 3 levels
- (2) removable, adjustable, stainless steel, 3" angled slide pairs
- Removable liner for inspection and maintenance

ELECTRICAL CONTROLS:

- Recessed thermostat w/built-in On-Off switch
- Heat range 100° - 300°
- Pilot lights
- Recessed connection box
- Thermostat, pilot lights set in removable access panel

DAMPERS:

- 2-position sliding type
- Controlled by push buttons
- Compartments individually controlled

INSULATION:

- Body fully insulated with 1-1/2" fiberglass, doors with fiberglass.

HEATING ELEMENTS:

- Sheath type strip heaters, 120 Volt, 1 Phase
- Removable compartment for ease of access to heating elements.

SHORT FORM SPECIFICATIONS:


Duke Thermotainers Food Holding Cabinets. Models 1603/1603P constructed with three (3) compartments. Compartments 9"H x 14"W x 23-1/2"D. Each compartment to have two (2) pairs of removable stainless steel slides. One thermostat controls all compartments. 100° - 300°F heat range with dial thermometer. Built-in installation - allow 1/4" tolerance greater than body width.



**THERMOTAINER FOOD HOLDING CABINETS - "A" SERIES
9"H x 14"W x 23-1/2"D COMPARTMENTS**

- 1603** Reach-In 1 thermostat for all 3 compartments, w/o legs
- 1603P** Pass-Thru 1 thermostat for all 3 compartments, w/o legs

| LEGEND |
|---------------------------|
| ▲ - ELECTRICAL CONNECTION |

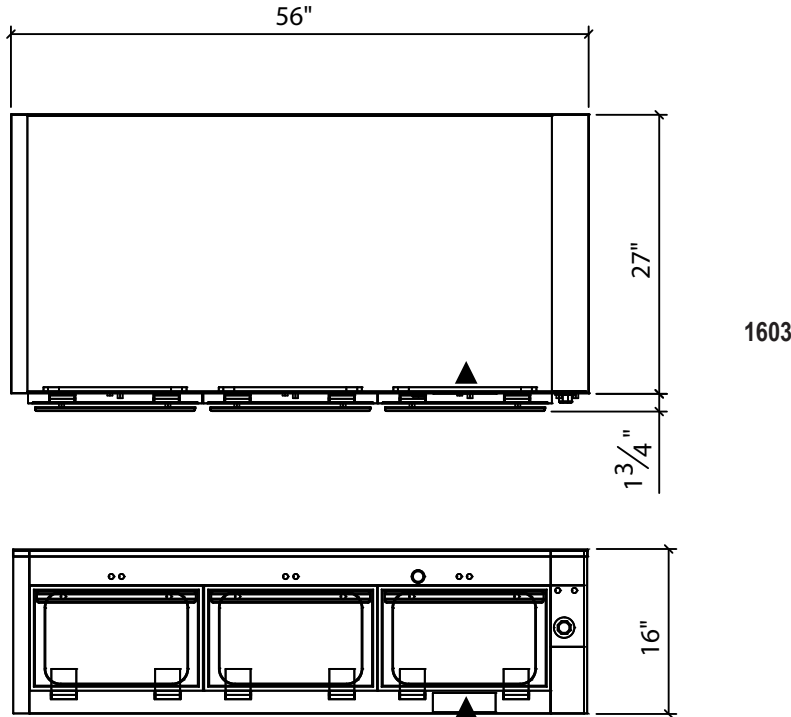

DIMENSIONS:

Freight Class: 100

| Model | Width | | Depth | | Height | | Comp. Depth | | Cube ft. crated | Weight | |
|-------|-------|-------|--------|------|--------|------|-------------|------|--------------------|--------|-------|
| | in. | cm. | in. | cm. | in. | cm | in. | cm | | lbs. | kg |
| 1603 | 56 | 142.2 | 28-3/4 | 73.0 | 16 | 40.6 | 23-1/2 | 59.7 | 28.2 | 350 | 159.1 |
| 1603P | 56 | 142.2 | 30-1/2 | 77.5 | 16 | 40.6 | 27-1/2 | 69.9 | 29.7 | 350 | 159.1 |

ELECTRICAL SPECIFICATIONS: (Consult factory for 3-phase electrical requirements and other options.) 120V, 1Ph

| Model | Connected Load |
|-------|----------------|
| 1603 | 1500 watts |
| 1603P | 1500 watts |

| | 1603/1603P |
|----------------------------|---|
| Capacity w/standard slides | (9) 12" x 20" x 2" pans or (6) 12" x 20" x 4" pans or (3) 12" x 20" x 8" pans |

- 1603** Reach In - hinged doors on front only
- 1603P** Pass Thru - hinged doors on front & back for pass-thru service



DUKE MANUFACTURING CO.

2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
800.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

Specification subject to change