



701 S Ridge Avenue, Troy, OH 45374
1-888-4HOBART • www.hobartcorp.com

THE COMBO – ROTISSERIE OVEN ON CONVECTION OVEN



THE COMBO – ROTISSERIE OVEN ON CONVECTION OVEN

STANDARD FEATURES

- The COMBO – winning combination of rotisserie oven stacked on convection oven
- Space saver – 2 different ovens in one footprint
- Menu flexibility – roasting rotisserie chickens on top with meatloaf, roasts, macaroni and cheese or potatoes on bottom

ACCESSORIES

- Stacking kit for HR7 on HEC

MODELS

- | | | |
|-------------------------------|----|---------------------------------|
| <input type="checkbox"/> HR7 | on | <input type="checkbox"/> HEC5 |
| <input type="checkbox"/> HR7E | | <input type="checkbox"/> HEC5D |
| | | <input type="checkbox"/> DEC5 |
| | | <input type="checkbox"/> HEC5X |
| | | <input type="checkbox"/> HEC5DX |
| | | <input type="checkbox"/> DEC5X |

Specifications, Details and Dimensions on Inside and Back.



THE COMBO – ROTISSERIE OVEN ON CONVECTION OVEN





701 S Ridge Avenue, Troy, OH 45374
1-888-4HOBART • www.hobartcorp.com

DETAILS AND DIMENSIONS

Front View Stacked Combo

Side View Stacked Combo

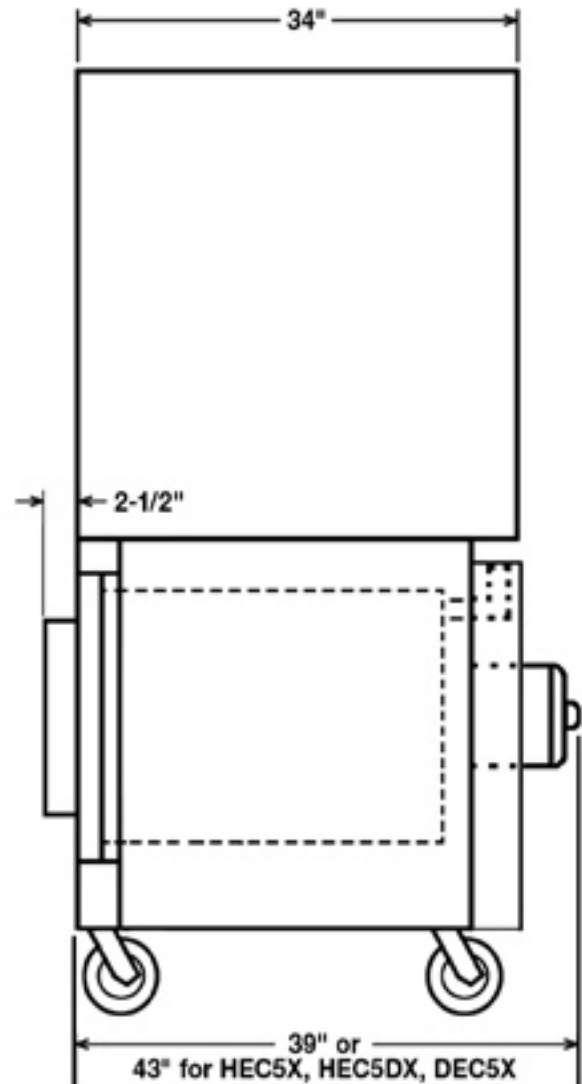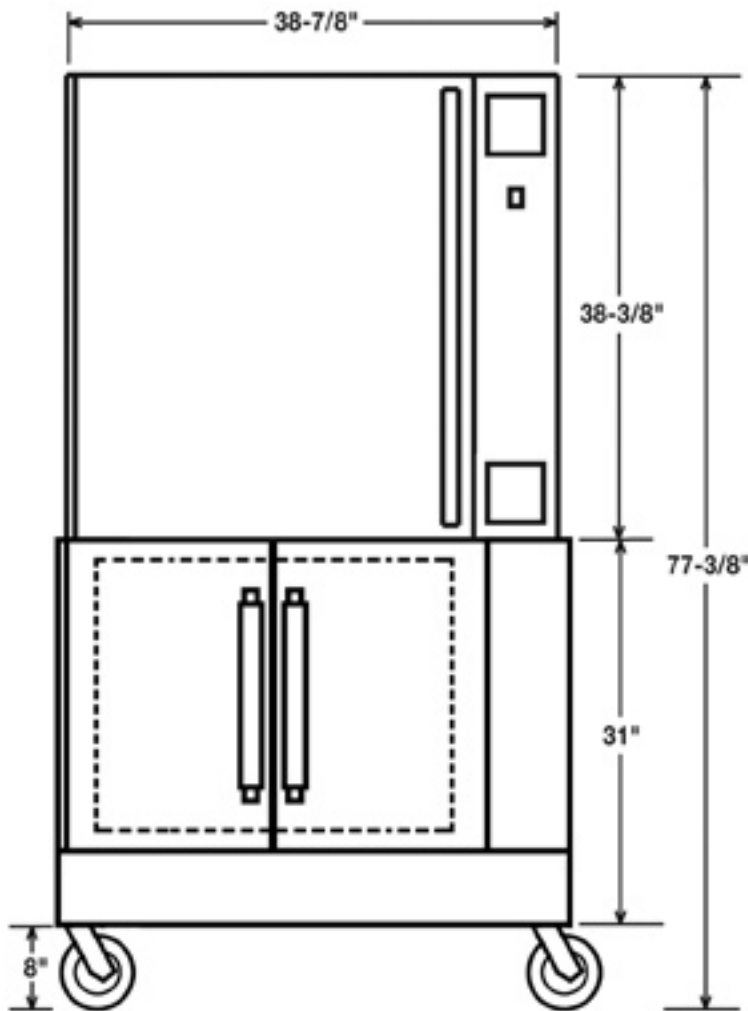





701 S Ridge Avenue, Troy, OH 45374
1-888-4HOBART • www.hobartcorp.com

THE COMBO – ROTISSERIE OVEN ON CONVECTION OVEN

DETAILS AND DIMENSIONS

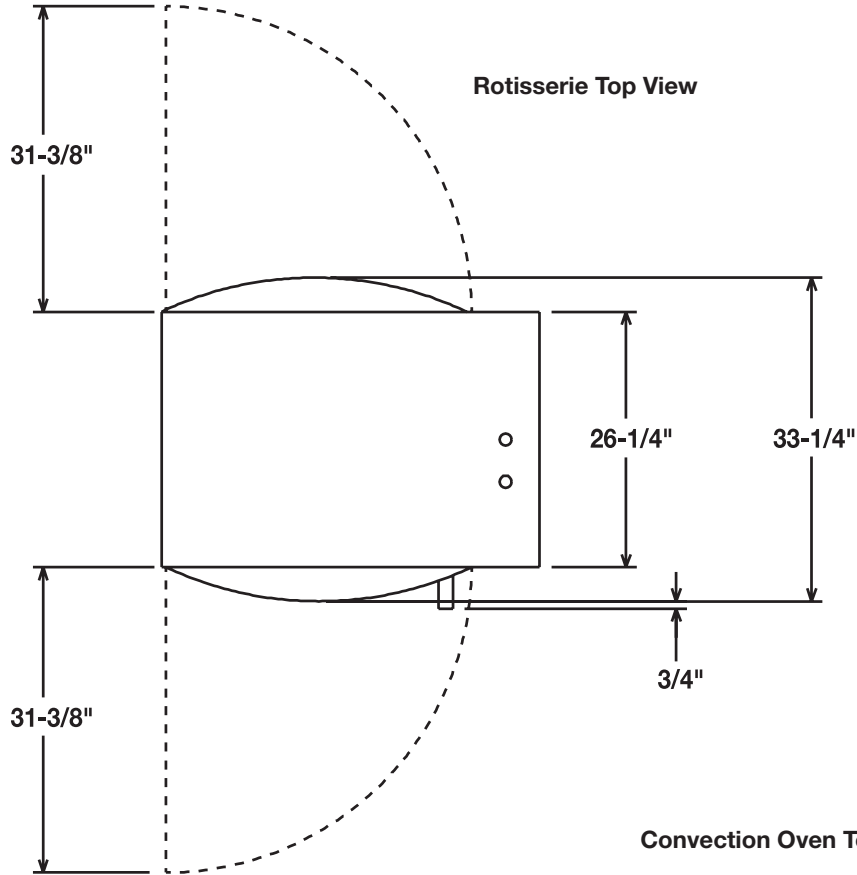

Convection Oven Top View

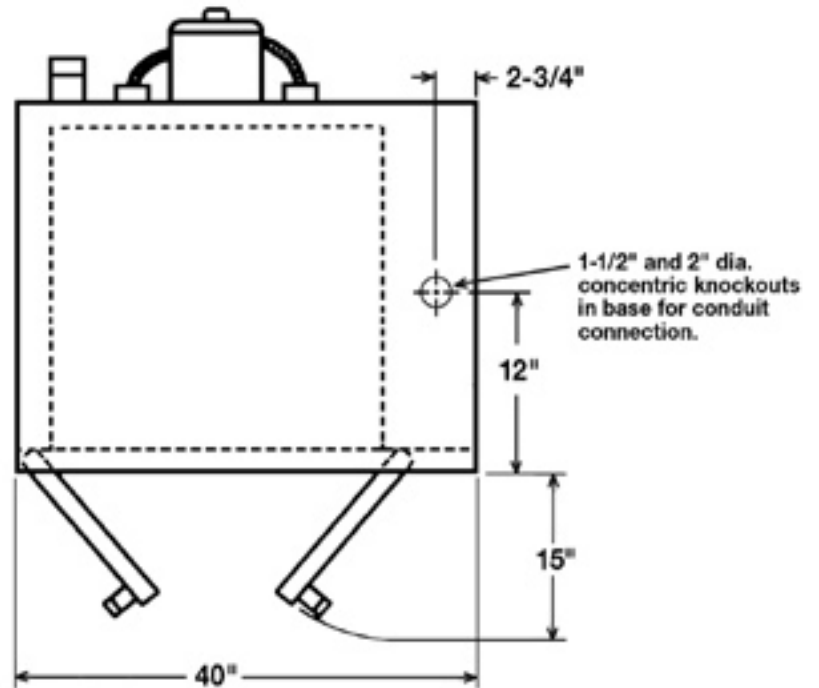

THE COMBO – ROTISSERIE OVEN ON CONVECTION OVEN



701 S Ridge Avenue, Troy, OH 45374
1-888-4HOBART • www.hobartcorp.com

MODEL NO.	WIDTH	DEPTH (INCLUDES HANDLES)	HEIGHT	KW PER OVEN	ELECTRICAL	APPROX. SHIPPING WT. LBS.
HR7 HR7E	38 ⁷ / ₈ "	34"	38 ³ / ₈ "	9.3	208/60/3/1 240/60/3/1	465
HEC5 HEC5D DEC5	40"	41 ¹ / ₂ "	31"	12.5	208/60/3/1 240/60/3/1	590
HEC5X HEC5DX DEC5X	40"	45 ¹ / ₂ "	31"	12.5	208/60/3/1 240/60/3/1	590
STACKED COMBO	40"	41 ¹ / ₂ " or 45 ¹ / ₂ "	77 ³ / ₈ "	—	—	—

MODEL NO.	TOTAL CONN. KW	3 PHASE LOAD KW PER PHASE			NOMINAL AMPS PER LINE WIRE							
					3 PHASE						1 PHASE	
					208 VOLT			240 VOLT				
		X-Y	Y-Z	X-Z	X	Y	Z	X	Y	Z	208V	240V
HR7 HR7E	9.3	3.1	3.1	3.1	24.7	24.7	24.7	22.4	22.4	22.4	42.8	38.8
HEC5 HEC5D DEC5 HEC5X HEC5DX DEC5X	12.5	4	4	4.5	35	33	35	33	29	33	60	52

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.