

## MODEL # SCAS-V SERIES

### SPECIFICATIONS

An Olympus Air Screen with a Euro-Style Standard. Features include insulated glass panels, stainless steel Interior and exterior, and adjustable shelving with interior lighting.



Available depths:  31 1/2"

Available lengths:  31 1/2"  44 1/4"  57 1/8"  69 7/8"

Available heights:  75 5/8"

### STANDARD FEATURES

- Self-Contained Refrigeration
- Stainless Steel Interior Ends
- Stainless Steel Exterior Finish
- Adjustable Feet
- Fan Assisted Cooling System
- Removable Stainless Steel Deck Pan with Hemmed Edge to Contain Spills
- Perforated Stainless Steel Interior Back Panel
- T5 Quick Snap-in Top Canopy Light
- (3) Adjustable Stainless Steel Extra Deep Shelves for Maximum Capacity with T-5 Lighting
- Pull Down Energy Saving Night Curtain
- Electronic Digital Control and Defrost Termination
- Red Indicator Light Alerts Operator if Condensing Unit Requires Cleaning
- Digital Temperature Display
- Front Air Intake with Top Rear Air Discharge for Zero Clearance
- Electric Condensate Evaporator Pan
- 8' Cord and Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty

### OPTIONAL FEATURES



- Casters
- Bullet Feet
- Adjustable Glass Shelves
- Glass Side Panels
- Motorized Roll Down Locking Night Cover  
(Adds additional 4" in height to the unit, 79 5/8" O.A.)
- Extra Large Heavy Duty Electric Condensate Evaporator Pan
- Easy Slide-out Condensing Unit
- Remote Refrigeration
- 5 Year Compressor Warranty

WHEN ORDERING, PLEASE SPECIFY:

APPLICATION: \_\_\_\_\_

REFRIGERATION TYPE: \_\_\_\_\_

## MODEL # SCAS-V SERIES

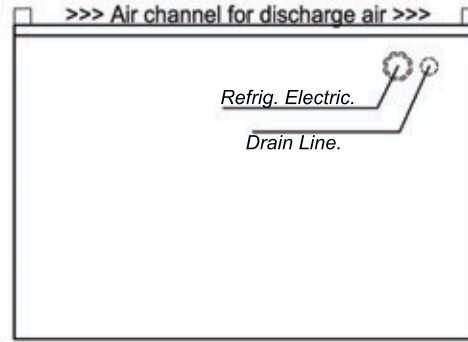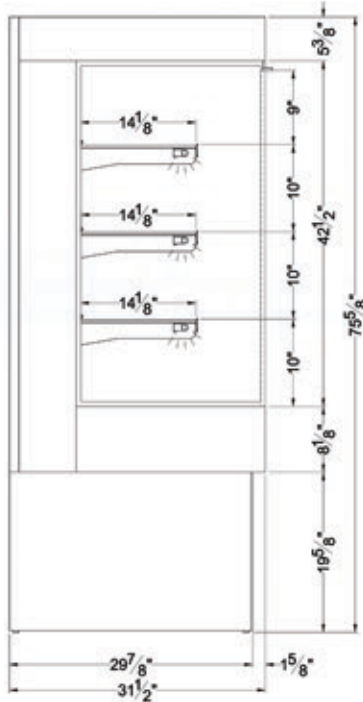

### Electrical & Plumbing locations



Conforms to UL Standard 471,  
and NSF Standard 7; Certified  
To CSA Standard C22.2 No.120

**NOTE:** A minimum of 12"  
clearance needed above  
unit for air discharge for  
self contained units.

MODEL	L	D	H	COMP HP	VOLT	AMP	NEMA PLUG	WT	REFRIG
SCAS36R-SC-V SERIES	31 1/2"	31 1/2"	75 5/8"	7/8	208-230V / 60Hz	12.1	L14-20P	575	134a
SCAS48R-SC-V SERIES	44 1/4"	31 1/2"	75 5/8"	1 1/4	208-230V / 60Hz	13.4	L14-20P	675	404A
SCAS60R-SC-V SERIES	57 1/8"	31 1/2"	75 5/8"	1 1/4	208-230V / 60Hz	14.6	L14-20P	775	404A
SCAS72R-SC-V SERIES	69 7/8"	31 1/2"	75 5/8"	1 1/2	208-230V / 60Hz	16.5	L14-20P	875	404A

1. Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.

2. RPI Merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55%RH. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degree Fahrenheit can affect the temperature of the entire cabinet

RPI in line with it's current policy to continually improve it's product reserves the right to change materials and specifications without notice

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)

220 ROUTE 70, MEDFORD, NJ 08055

