

HOLDING & TRANSPORT**VULCAN****VBP15I
HOLDING & TRANSPORT CABINET**

Model VBP15I



UL listed. UL listed to Canadian safety standards.
Classified by UL to NSF Std. #4.

SPECIFICATIONS

Vulcan Hart Model No. VBP15I heated holding and transport cabinets. Blower motor for gentle and even temperature distribution. Complete with full perimeter bumper and 5" heavy duty casters (2 swivel with brakes and 2 rigid). Recessed control panel containing dual indicator light, thermometer, and full range thermostat for temperatures up to 190°F (88°C). Cabinet capacity is 15 each 18" x 26" sheet pans, 30 each 12" x 20" x 2½" steam table pans, or a combination of both on 3" centers. Complete with 10 pairs of universal tray slides adjustable on 1½" centers. Cabinet interior and exterior are both constructed out of 20 gauge stainless steel. Recessed side-mounted lift handles, magnetic action door latch, and full insulation; 1½" in side walls and 2" in top. Integrated steel frame for maximum strength. Field reversible doors. Complete with top mounted cord, cord wrap, and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts. 120 volts, 1,200 watts, 10 amps. Lifetime warranty on heating elements.

Exterior Dimensions:

27" W x 33¾" D x 67" H

VBP15I Holding & Transport Cabinet

STANDARD FEATURES

- Holding and Transport Capacity:
 - 15 each – 18" x 26" sheet pans
 - 30 each – 12" x 20" x 2½" pans or a combination of both on 3" centers
- Blower motor for gentle and even temperature distribution
- Dutch doors
- Full perimeter bumper
- 5" heavy duty casters (2 with swivel with brakes and 2 rigid)
- Recessed side mounted lift handles
- Recessed control panel
- Dual indicator lights
- Thermometer
- Full range thermostat for temperatures up to 190°F (88°C)
- Ten pairs of universal tray slides adjustable on 1½" centers
- Interior and the exterior are both constructed out of 20 gauge stainless steel
- Fully insulated with 1½" in side walls and 2" in top
- Integrated steel frame for maximum strength
- Magnetic action door latch
- Field reversible doors
- Top mounted cord
- Complete with cord and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts
- 120 volt, 1,200 watts, 10 amps
- Cord wrap
- Lifetime warranty on the heating elements

OPTIONS

- 208/240 vol
- Humidity pan
- Glass Dutch doors
- Pass through
- Wire shelves to sit on tray slides
- Electronic control with digital display
- Transport latch
- Additional tray slides




VULCAN

a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602



VBP15I
HOLDING & TRANSPORT CABINET

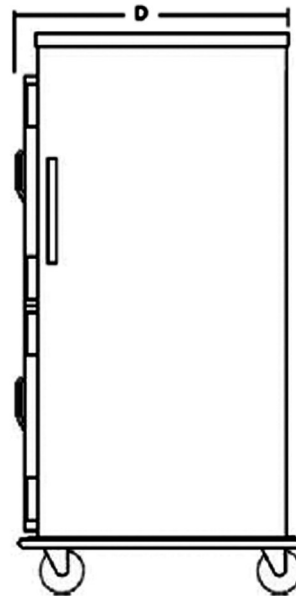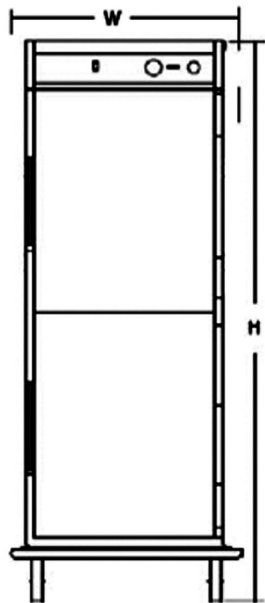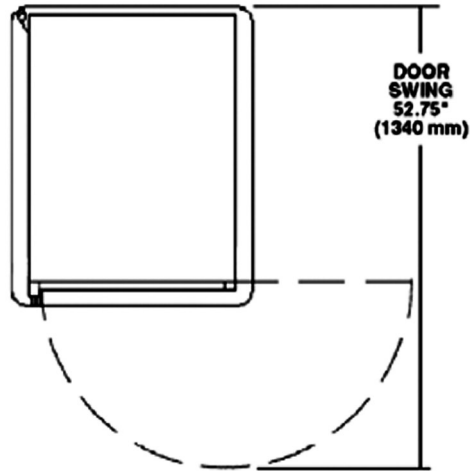

| CAPACITY | | DIMENSIONS | ELECTRICAL | | | SHIPPING WEIGHTS |
|----------------------|----------------------|------------------------|------------|-------|------|--------------------|
| 12" x 20" x 2½" PANS | 18" x 26" SHEET PANS | EXTERIOR | VOLTS | WATTS | AMPS | LBS / KG |
| 30 | 15 | 27" W x 33¾" D x 67" H | 120 | 1,200 | 10 | 297 lbs. / 135 kg. |



a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

NOTE: In line with its policy to continually improve its products, Vulcan reserves the right to change materials and specifications without notice.