

Faster Toast. Fewer Slowdowns

Two belts, faster toast times, quick settings changes keep the line moving

Toast two different bread types simultaneously at different settings with Toast EZ's dual belt, dual heater system.

Intuitive touch screen display for quick changes, temperature and speed controls.



3-year validated heater life ensures toaster uptime and longevity.

Menu Flexibility offering 32 easy-to-program toast presets.

Superior Versatility

- Dual lane feed zone allows for toasting two different product types at the same time.
- Conveyors can run at different speeds to accommodate two different bread types or run at the same speed to toast long buns.
- Easily adjust toast settings to light, medium, dark.

High Quality

- Dual high-performing heaters validated for 3-year lifespan provide uniform toasting and superior product quality.

Menu flexibility

- 32 easy-to-program toast pre-sets.

Space-Saving Design

- Narrow 16.5" footprint saves counter space.

Energy Savings

- Idle time to enter energy save mode is configurable, with a default setting of 15 minutes. Energy save mode is exited by touching the touchscreen.
- Energy save mode can be disabled by the customer if desired.

Crew-Friendly Operations

- Large intuitive, touch screen menu for easy operation.
- Intuitive iconographic user interface eliminates language barriers.

Easy to Clean

- Pull out crumb tray for easy cleaning.
- Easy to remove wire rack for cleaning.

Easy to Service


- USB port for menu uploads and firmware updates.

Toast EZ

Infrared Radiant Toaster

Dual Lane

Toast EZ provides menu flexibility that your customer's crave. With dual toasting capability and single-tap setting adjustments, handle any bread type at any time without losing uptime - perfect for all day menu variations.

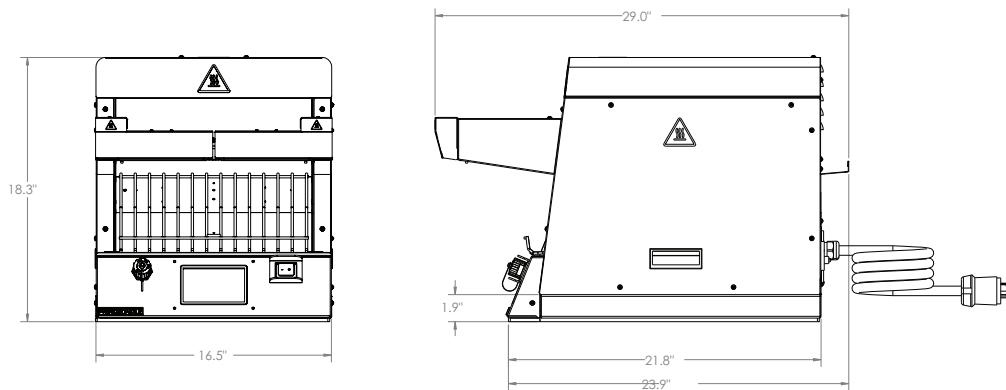

Technical Specification

Product Category	Dual Lane IR Toaster
Packaging Dimensions	33.75"W x 21.0"D x 27.0"H
Shipping Weight	113 lbs
Power Requirements	208V, 60 Hz, 24A, Single Phase L6-30P
Installation Type	Countertop
Toasting Type	Infrared Dual Belt
Operating Temperatures	700° - 900°F

Exterior Construction	Stainless steel construction with anti-slip rubber base
Bread Diameter	5.5" Single Lane / 11" dual lane
Belt	2x Wire belts with individually controlled toast time and temperature
Controls	5" LCD Touchscreen
Toasting Time	6-90 Seconds
Warranty	1 Year Parts and Labor

Model Numbers	Description	Heater Source	Volts	Hertz	Watts	Plug	Dimensions
IRTDLS2-GMS13	Infrared Toaster Dual Lane, Top Heaters	2x 2200W Upper Tubular IR heaters	208V	60Hz	5000W	6-30P	16.5"W x 18.3"H x 21.8" D
IRTDLD2-GMS13	Infrared Toaster Dual Lane, Two Top and Two Bottom Heaters	2x 1500W Upper Tubular IR heaters 2x 980W Lower Tubular IR heaters	208V	60Hz	5000W	6-30P	16.5"W x 18.3"H x 21.8" D
IRTDLS2-GMS22	Infrared Toaster Dual Lane, Top Heaters	2x 2200W Upper Tubular IR heaters	208V	60Hz	5000W	L6-30P	16.5"W x 18.3"H x 21.8" D
IRTDLD2-GMS22	Infrared Toaster Dual Lane, Two Top and Two Bottom Heaters	2x 1500W Upper Tubular IR heaters 2x 980W Lower Tubular IR heaters	208V	60Hz	5000W	L6-30P	16.5"W x 18.3"H x 21.8" D

Contact your Prince Castle representative today to learn more about **Toast EZ**.