



General Information

Project Name: _____

Consultant: _____

Item #: _____

Model #: _____

Quantity: _____




Specifications

PFT Model Portable Troughs are constructed of 14GA Type 304 Stainless Steel. Trough is pitched to a 2" drain with 1½" tailpiece connected to an elbow & twist drain. Unit is 6" deep.

18GA stainless steel removable perforated scrap tray sits on ¾" integral ledge to collect food scraps. Perforation is ¼" holes spaced 1" apart. Trough sits on 2 swivel & 2 rigid 5" casters w/ (2) brakes, mounted on enclosed channels.

½ 16GA stainless steel cover keeps water from splashing out while in transit. Scrap tray cover can be positioned on either end.

Retractable pull handle is constructed of ½" stainless steel rods.

Joints are TIG welded & leakproof. All welds are ground smooth & polished to a #4 finish.



Product Guide

Use for Commercial and Institutional Buildings or large food prep facilities.

Unit is generally used underneath kettles or any equipment where liquid drainage is present.

Portable Trough is especially useful where a kettle's pour path does not line up correctly with troughs or where field conditions prohibit the placement of trough in kettle pour path.


Handle slides inside when not in use for easy storage.




Options

- Custom Size _ x _
- Custom Depth - 4", 8", 10"
- Full Cover
- Full Scrap Tray
- Corner Bumpers


DRAWINGS

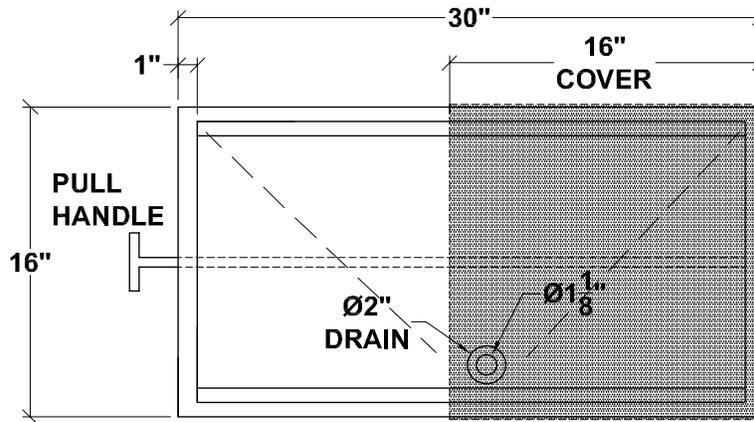

PLAN

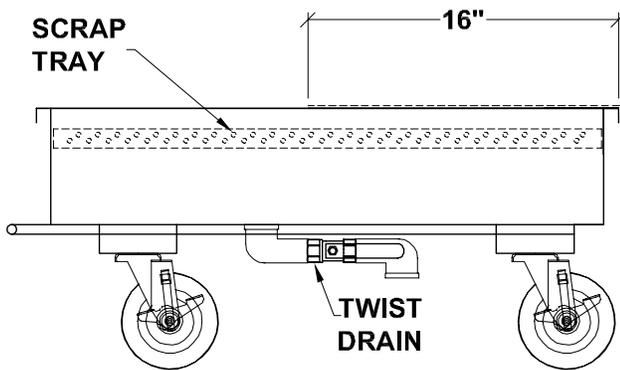

SIDE

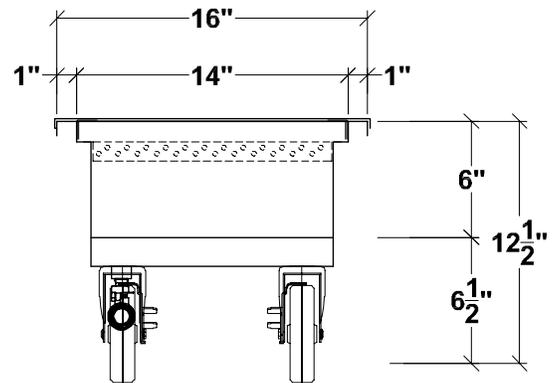

FRONT

PORTABLE FLOOR TROUGH

Model	Size (W x L x D)	Model	Size (W x L x D)
□ PFT-1630	16" x 30" x 6"	□ PFT-2230	22" x 30" x 6"
□ PFT-1636	16" x 36" x 6"	□ PFT-2236	22" x 36" x 6"
□ PFT-1648	16" x 48" x 6"	□ PFT-2248	22" x 48" x 6"
□ PFT-1654	16" x 54" x 6"	□ PFT-2254	22" x 54" x 6"
□ PFT-1660	16" x 60" x 6"	□ PFT-2260	22" x 60" x 6"
□ PFT-1672	16" x 72" x 6"	□ PFT-2272	22" x 72" x 6"

Note: For custom sizes, contact factory.
Specifications subject to change without notice.