

OLYMPUS II TURBO CHILL AIR SCREEN

PROJECT: _____
ITEM: _____ QUANTITY: _____

MODEL # SCAS-II-TC

SPECIFICATIONS

Standard air screen refrigerators are designed to keep pre-chilled product cold. The Turbo Chill refrigerator is a unique design that will chill room temperature product to 40°F in two hours or less. Most operators do not have ample refrigerated storage to chill beverages quickly, which creates ongoing frustration in serving their customers an acceptable product.



Available depths: 32"

Available lengths: 60"

Available heights: 78"

STANDARD FEATURES

- Self-Contained Refrigeration
- Squared Top Canopy
- Metal Frame Base Construction with Lift-Out Black Louvered Air Grill for Easy Access to Compressor
- Stainless Steel Interior Ends
- Standard Grade Laminated Exterior
- Removable Stainless Steel Interior Back and Side Plenums
- T5 Quick Snap-in Top Canopy Light
- (3) Adjustable Stainless Steel Extra Deep Shelves for Maximum Capacity, with T5 Quick Snap-in Lights
- Electronic Digital Control and Defrost Termination
- Red Indicator Light Alerts Operator if Condenser Requires Cleaning
- Digital Temperature Display; One for Normal Mode, One for Turbo Chill Mode
- Unique Internal Baffle Design for Compressor Noise Reduction
- Front Air Intake with Top Rear Air Discharge for Zero Clearance
- Slide-Out Condensing Unit.
- Electronic Condensate Evaporator Pan
- 8' Cord and Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Conforms to NSF STD 7 **TYPE II** Refrigeration
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty

OPTIONAL FEATURES

- Green Screen
- Stainless Steel Exterior Finish
- Special Laminates
- Miscellaneous Trim
- Wood Veneers (Stained & Sealed)
- Promolux Lighting (Low UV)
- Casters (Increases Height by 6")
- Bullet Feet (Increases Height by 6")
- Mirrored Polished Stainless Steel Interior Ends
- Mirrored Polished Stainless Steel Perforated Back
- Finished Back with Black Air Grill
- Stainless Steel Louvered Air Grill
- Fold Down Stainless Steel V-Ribbed Tray Slide
- Fold Down Corian Tray Slide
- Stationary Corian Tray Ledge
- Extra Large Heavy Duty Electric Condensate Evaporator Pan
- Remote Refrigeration
- 5 Year Compressor Warranty

WHEN ORDERING, PLEASE SPECIFY:



APPLICATION: _____

REFRIGERATION TYPE: _____

LAMINATE COLOR: _____

OLYMPUS II TURBO CHILL AIR SCREEN TOLL FREE: 800-525-3692

MODEL # SCAS-II-TC

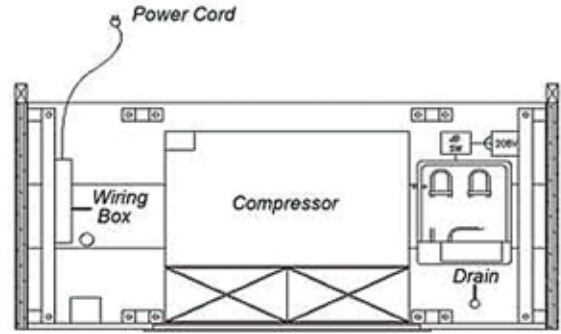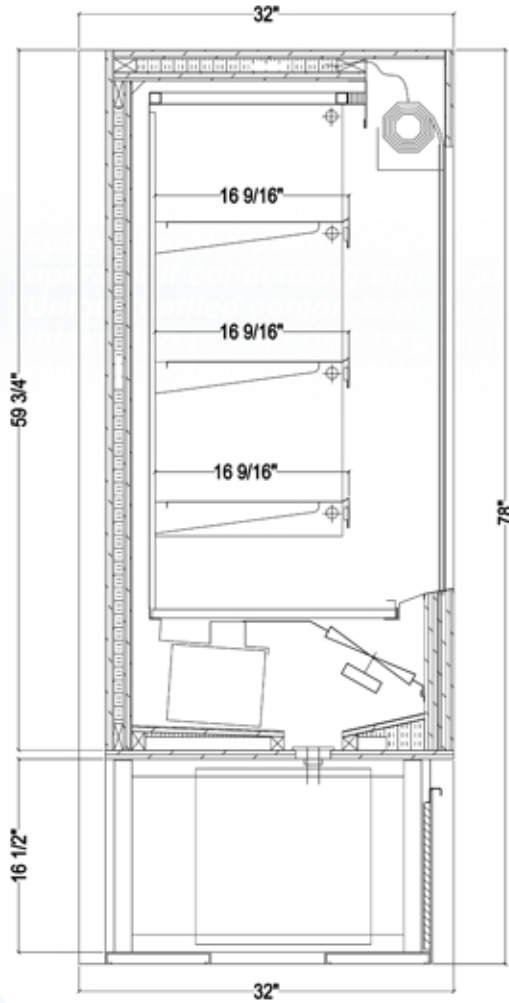

Electrical & Plumbing locations



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120

MODEL	L	D	H	COMP HP	VOLT	AMP	NEMA PLUG	WT	REFRIG
SCAS60R-TC	60"	32"	78"	1 1/4	115-208/230 4 wire	19.8	L14-30P	1178	404A

1. Total amps for the 5 ft. units includes 4.8 Amps for the condensate evaporator.
2. The SCAS-TC merchandiser is designed for use in locations where temperature and humidity do not exceed 80 degrees F and 60% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the case's air curtain and refrigerated zone within. Any adverse conditions will affect warranty.

RPI in line with it's current policy to continually improve it's product reserves the right to change materials and specifications without notice

CALL TOLL FREE: 800-525-3692 (609-714-2330)
FAX: 609-714-2331 www.rpiindustries.com
220 ROUTE 70, MEDFORD, NJ 08055

