

# VIENNA COUNTER TOP COLD DISPLAY

PROJECT: \_\_\_\_\_  
ITEM: \_\_\_\_\_ QUANTITY: \_\_\_\_\_

## MODEL # VICD-SQ CT SQUARED GLASS

### SPECIFICATIONS

The VICD-SQ-CT Vienna Series is a refrigerated full service display style unit designed for counter top application, featuring insulated squared front glass and glass side panels. Units are standard in stainless steel with an adjustable shelf, lights and sliding rear see-through access doors.



Available depths:  32 5/8"

Available lengths:  31 1/2"  44 1/4"

Available heights:  28 3/8"

### STANDARD FEATURES

- 304 Stainless Exterior
- Insulated Front Glass, Side Panels and Doors
- Tilt-Out Front Glass
- Squared Profile
- Sliding Rear See-Through Access Doors
- (1) Adjustable Glass Shelf with Light
- Easy Removable Deck Pans for Cleaning
- Programmable Digital Refrigeration Controller
- Self-Contained Refrigeration with Rear Compressor Housing
- Fan Assisted Cooling System
- Lift-Up Evaporator
- Environmentally Safe Refrigerant
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Built in Condensate Evaporator Pan, (Fully Automatic, No Floor Drain Required)

### OPTIONAL FEATURES


- Remote Refrigeration
- 5 Year Compressor Warranty

WHEN ORDERING, PLEASE SPECIFY:

APPLICATION: \_\_\_\_\_

REFRIGERATION TYPE: \_\_\_\_\_

**MODEL # VICD-SQ-SC-CT SQUARED GLASS**

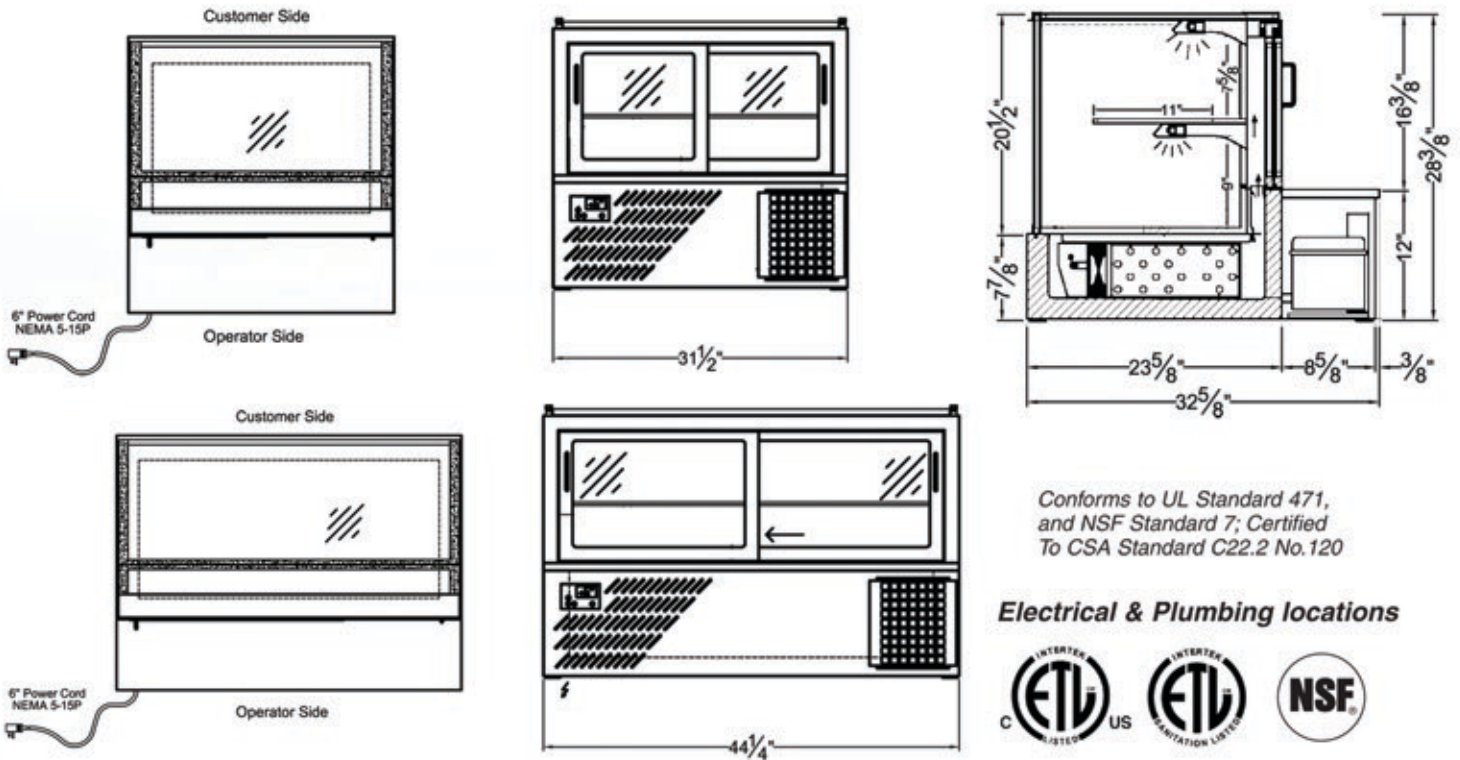

Conforms to UL Standard 471,  
and NSF Standard 7; Certified  
To CSA Standard C22.2 No. 120

**Electrical & Plumbing locations**



MODEL	L	D	H	COMP HP	VOLT	AMP	NEMA PLUG	WT	REFRIG
VICD2-20-R-SQ-SC-CT	31 1/2"	32 5/8"	28 3/8"	1/5	115	3.8	5-15P	385	134a
VICD3-20-R-SQ-SC-CT	44 1/4"	32 5/8"	28 3/8"	1/4	115	4.8	5-15P	440	134a

RPI Merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55%RH. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degree Fahrenheit can affect the temperature of the entire cabinet

RPI in line with it's current policy to continually improve it's product reserves the right to change materials and specifications without notice

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)

220 ROUTE 70, MEDFORD, NJ 08055

